



QUADCO

600TS Processor

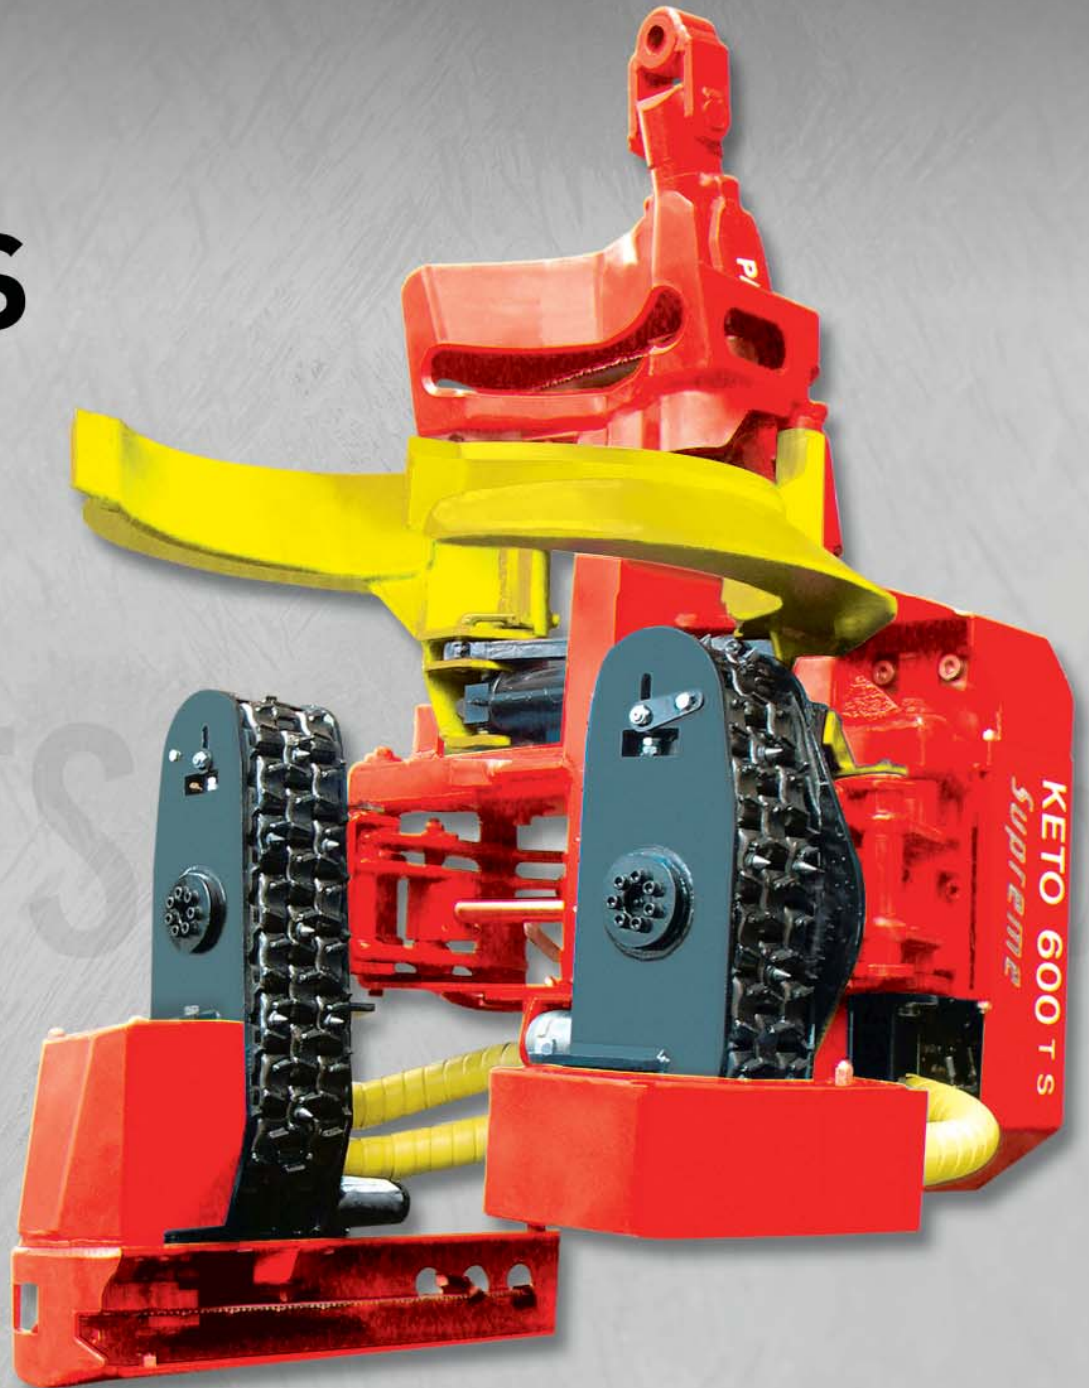

QUADCO Equipment Inc.
ENGINEERING A BETTER WAY


Features

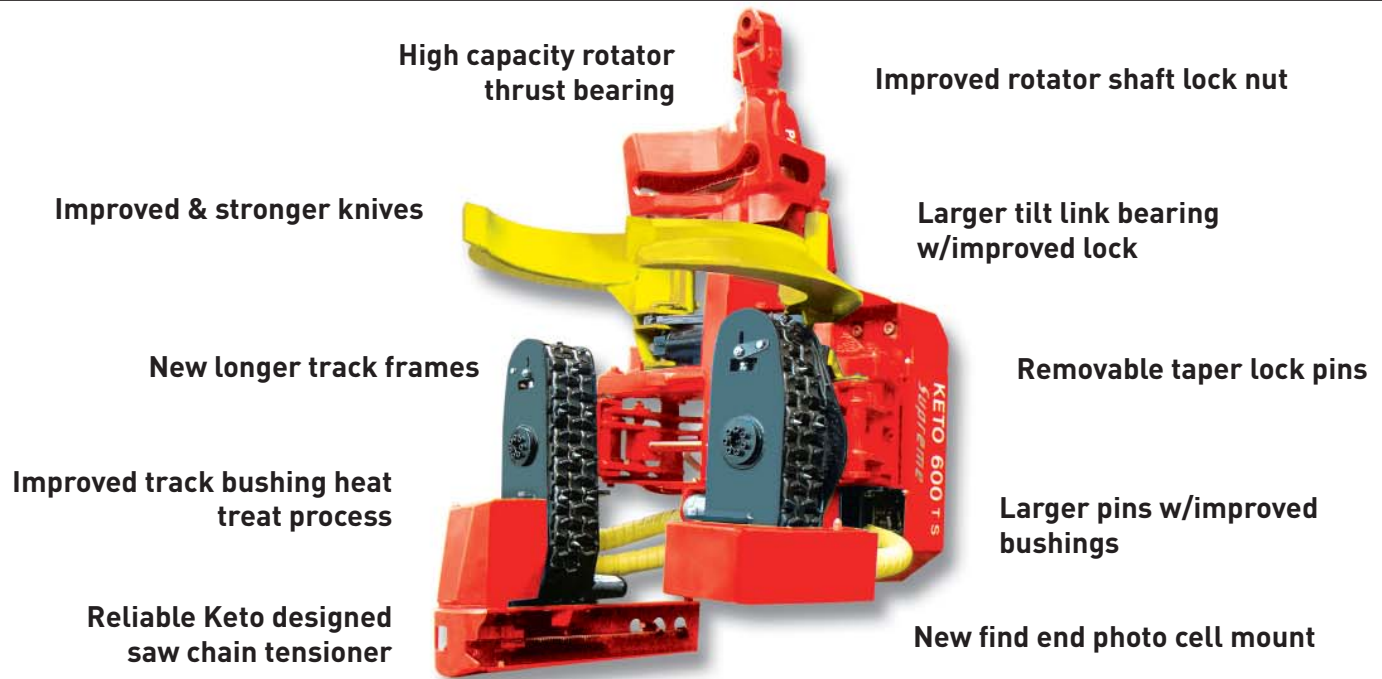

Specifications*

Model	600TS	
Weight (including rotator)	3,300 lbs	
Height to the center of hanger pin	tilt up	78.7"
	tilt down	96.5"
Rotator	built-in	
Depth tilt up	47.2"	
Width	closed, main frame	46.5"
	open outside guards	55.1"
Length to the tip of top knife	65"	
Saw Bar maximum	29.5"	type 0.404"
Top Saw	16.5"	type 0.404"
Knives/Arms	3 pcs	
Maximum Opening	knife tip to tip	24.5"
	tracks link surface	27.5"
Feeder Type	tracks number	2
Maximum Feeding Speed	14.8 pi/s	4,5 m/s
Tractive Force (Motor options)	6.0-8.0 x 1,000 lbs	27.2-36.1 kN
Track	length	28.7"
	width	7.3"
Oil Flow	55-100 gpm	208-380 l/min
Maximum System Pressure	3,800 psf	260 bar
Recommended Carrier Size	125 hp +	45,000 lbs 20 ton +
Measuring Length	track	double

*Specifications are subject to change without notice. Options may be shown in the pictures.

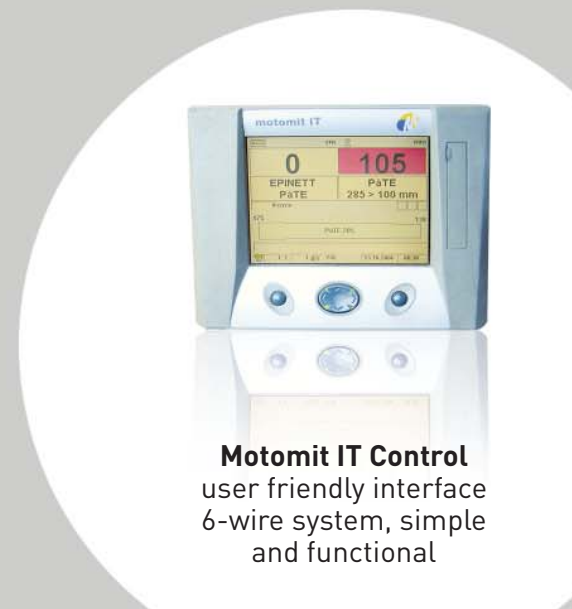

Motomit IT Control
user friendly interface
6-wire system, simple
and functional

QUADCO Equipment Inc.

www.quadco.com 1-800-668-3340 St-Eustache, QC - Prince George, BC - Lexington, SC, USA - Vancouver, WA, USA